


# PIERCE FTS 170 FASTRACK™ SKIDDER



## Designed To Operate In Adverse Conditions

- A Rugged, Simple Design For Reliability
- Simplified Controls

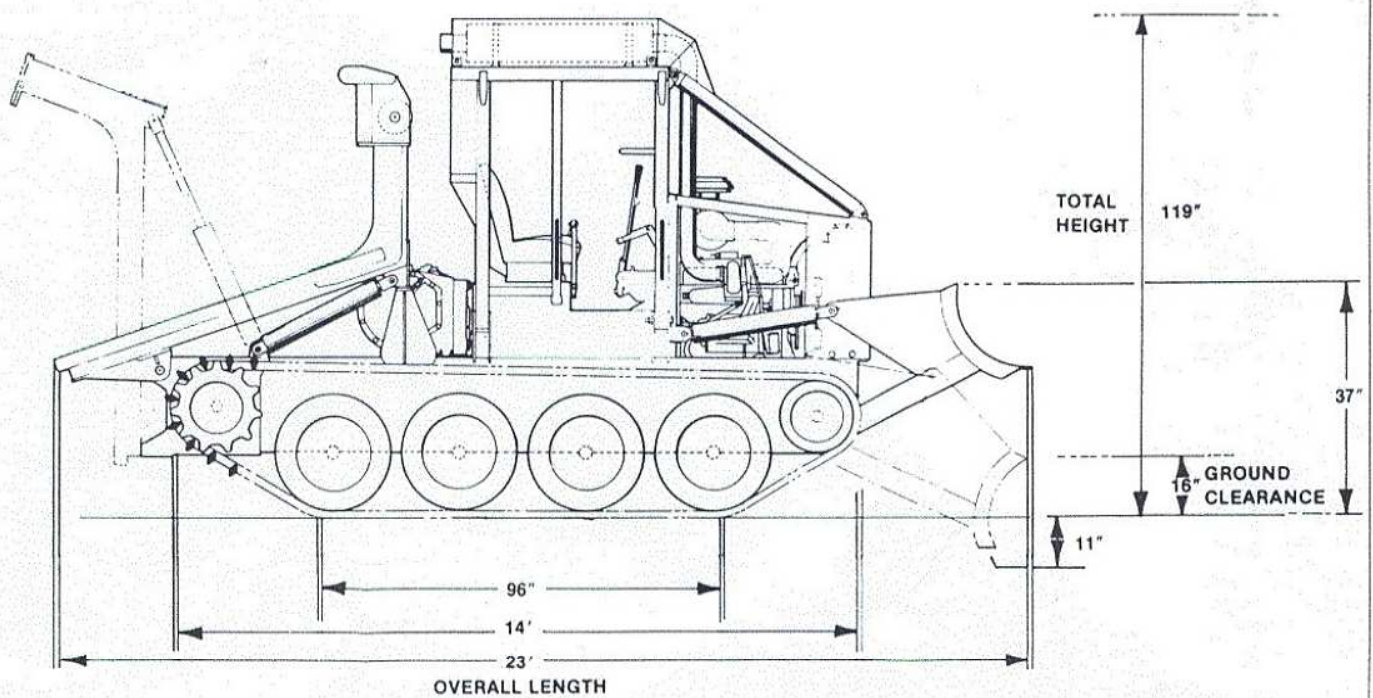

PIERCE-PACIFIC MFG., INC.  
18201 S.W. Boones Ferry Road

Tualatin, Oregon 97062  
(503) 620-9880



# Specifications

## PIERCE F.T.S. FASTRACK 170 SKIDDER

<b>General</b>		<b>Suspension &amp; Track</b>	
Speed	@ 2,700 RPM	Type of Suspension	Road Wheel, w/Torsion Bars
	Gear MPH	Type of Track	Forged Steel Grousers
	1 2.9	Track Shoe Width	22"
	2 6.1	Gauge	60"
	3 10.7	Number of Road Wheels	4 (per side)
Shipping Weight	23,500 lbs.	Length of Track on Ground	96"
		Area of Track on Ground	4224 sq. in.
		Ground Pressure	5.6 psi
<b>Engine</b>		<b>Dimensional</b>	
Make	General Motors, Detroit Diesel	Overall Length (w/Blade)	276" (23')
Model	4-53T	Overall Height	119½"
Number of Cylinders	4	Overall Width	82"
Displacement	212 cu. in.	Ground Clearance	16"
Horsepower (Brake)	170 bhp		
Governed RPM	2800 rpm		
Electrical		<b>Standard Equipment</b>	
Starting	12 volt	Air Cleaner	Dry Type, w/Pre cleaner
Alternator	45 amp	Arch	Hydraulic Actuated, Four (4) Roller Fairlead
		Blade	Decking, w/Log Deflectors for Light Dozing and Brush Clearing
<b>Powertrain</b>		Brakes	Service, Parking and Steering
Transmission	Clark HR28336, Full Powershift, 3 speed forward, 3 speed reverse	Canopy	ROPS, w/Side, Front and Rear Screens
Torque Converter	Integral w/Transmission		
Final Drive	Dual Planetary w/Brake		
<b>Winch</b>			
Make	Gearmatic		
Model	119		
Line Pull (maximum)	Bare Drum—24,600 lbs. Full Drum—12,950 lbs.		
Drum Capacity	235' of 5/8" Wire Rope		

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

### OTHER KEY FTS 170 FEATURES:

- With an 82" overall width, the FTS 170 will accommodate all thinning operations.
- Smooth Belly Pan for protection of power train components and suspension.
- Elevated operators cab for greater visibility.
- Extendable Logging Arch

Distributed By: